



Using Pager Notification


SVMi Application 7

January 9, 2006


This document covers the process of activating the **Paging** feature on the SVMi product.

Task: Between the hours of 8:00am and 5:00pm the SVMi will notify a pager that a new message has been left in mailbox 201.


1. Log in to the SVMi, and in the **System Main Menu** window highlight and select **Open Block Table**.

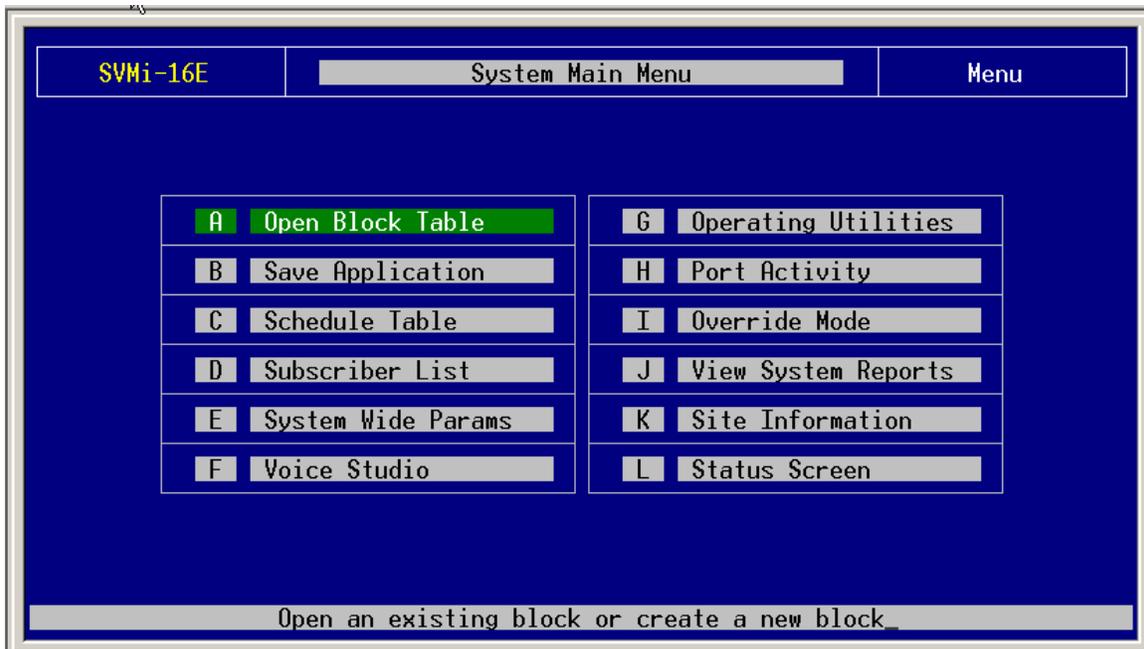

2. After pressing the <enter> key the **Open Block** screen will be displayed.

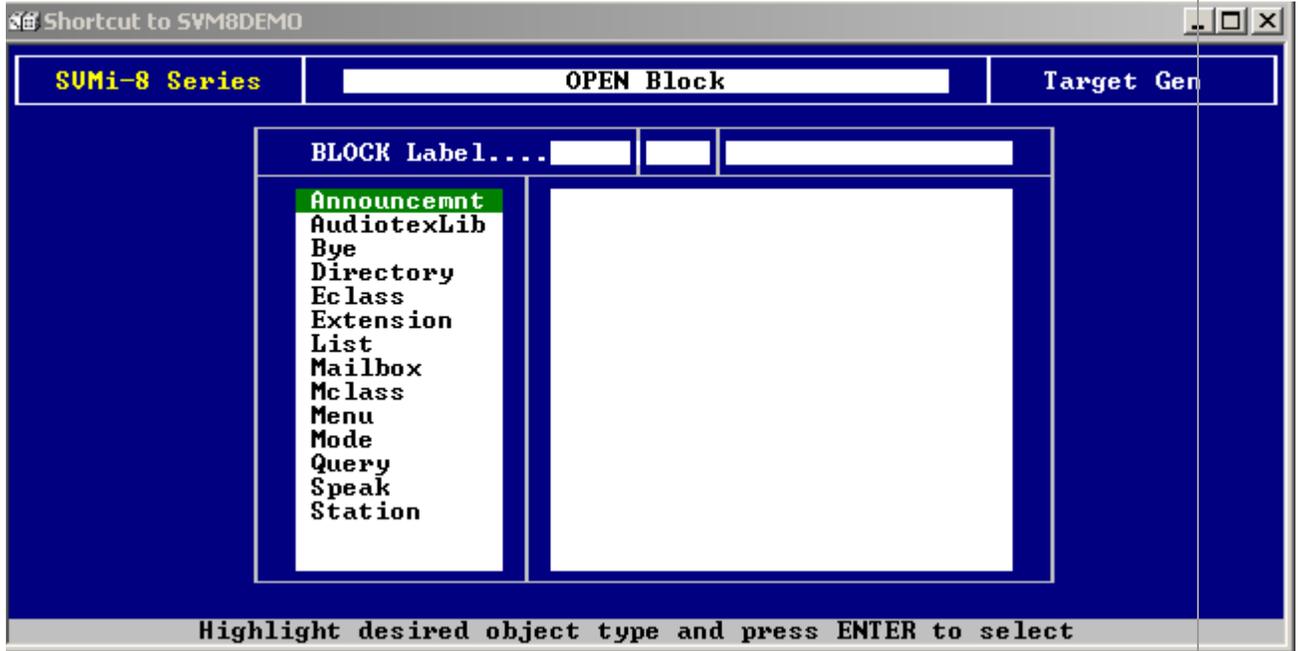

3. Please use the arrow down key or press the letter 'M' once to get into the **Mailbox Block** menu choice and then press the <enter> key. Choose the **Mailbox Group** number and then press <enter> again.

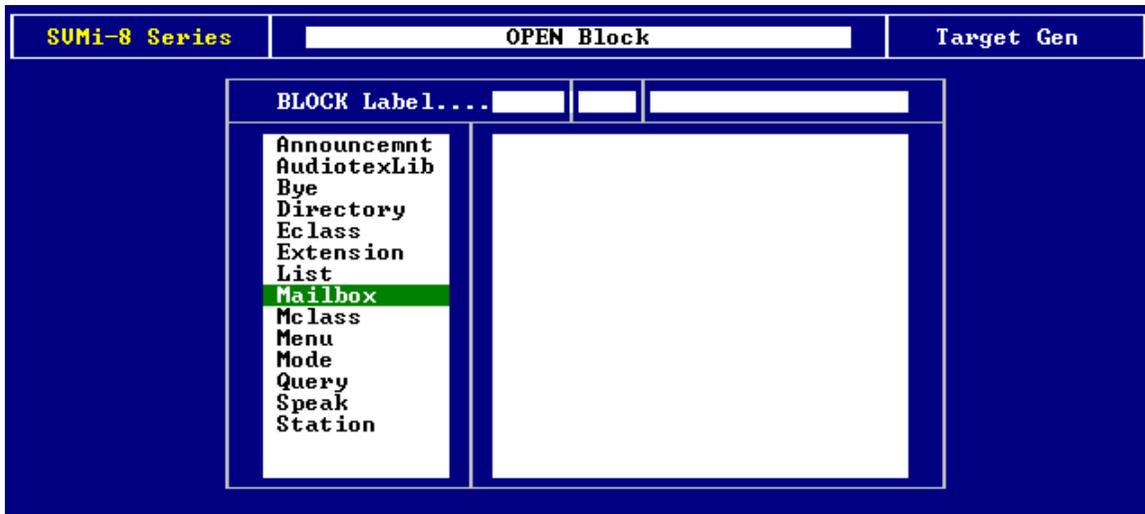

4. Use the up and down arrow keys to highlight the mailbox (in this case 201) that this feature is to be set up on and press the <enter> key.

SUMi-8 Series		OPEN Block		Target Gen
BLOCK Label....		MBX	01	
Announcemnt	NEW			
AudiotexLib	201	201		
Bye	Operator	500		
Directory	TEMPLATE MBX	d		
Eclass				
Extension				
List				
Mailbox				
Mclass				
Menu				
Mode				
Query				
Speak				
Station				

5. After pressing the <enter> key Page 1 of the Mailbox Block for extension 201 will be displayed.

SUMi-8 Series		MAILBOX - 201		Page 1 of 5
Group: 1		Number: 201		Extension: 01:201
VisiComm User:		Mclass: 01:Standard MCL		
Mailbox Controls		Authorizations		
Announce only mailbox.....	N	Forced messages allowed.....	N	
Subscriber administrator...	N	Workload Manager.....	Y	
Use LIFO message ordering..	N	Commitment/Follow Up allowed.....	N	
New message beep(s).....	N	Message grouping allowed.....	N	
Directory Public: Y	User: Y	Mailbox greeting allowed.....	Y	
Subscriber password: *****		Message alert control allowed....	Y	
Language English, American		Extended prompting enabled.....	Y	
Retention days left.....	0	Auto Play of new messages enabled:	Y	
		Auto Play of message info enabled:	Y	


6. Press the **Ctrl+D** keys twice to go to page 3 of extension 201's **Mailbox Block**.
7. On page 3 make sure that **Pager notification is enabled = Y**.
8. Verify that the **Dial** field contains the phone number of the pager.
9. Now set up the desired delivery schedule for the message alert. In the example shown below the delivery schedule is set for Mon.-Fri. from 8:00am to 5:00pm and no alerts on the weekend.

SVMi-8E		MAILBOX - 01 202		Page 3 of 6	
Pager Notification			Fax Mail		
Pager notification is enabled.... Y			Mailbox can receive faxes.. Y		
Notify on urgent messages only.... N			Mailbox can send faxes.... Y		
Station..... Beepers			Fax delivery is on..... N		
Dial: 9725551234			Deliver urgent faxes only.. N		
Notification Schedule			Delivery Schedule		
Sunday.....	Off	Off	Sunday.....	12:00A	12:00A
Monday.....	8:00A	5:00P	Monday.....	12:00A	12:00A
Tuesday.....	8:00A	5:00P	Tuesday.....	12:00A	12:00A
Wednesday.....	8:00A	5:00P	Wednesday....	12:00A	12:00A
Thursday.....	8:00A	5:00P	Thursday.....	12:00A	12:00A
Friday.....	8:00A	5:00P	Friday.....	12:00A	12:00A
Saturday.....	Off	Off	Saturday.....	12:00A	12:00A
The pager number to dial for notification of new messages					

10. Press the **Ctrl+E** keys to get back to the **Open Block** screen then highlight the **Station Block** and press the **<enter>** key.

SUMi-8 Series	OPEN Block	Target Gen
BLOCK Label....		
Announcemnt		
AudiotexLib		
Bye		
Directory		
Eclass		
Extension		
List		
Mailbox		
Mc class		
Menu		
Mode		
Query		
Speak		
Station		

11. Using the up and down arrow keys highlight and select **Beepers Block** then press the <enter> key.

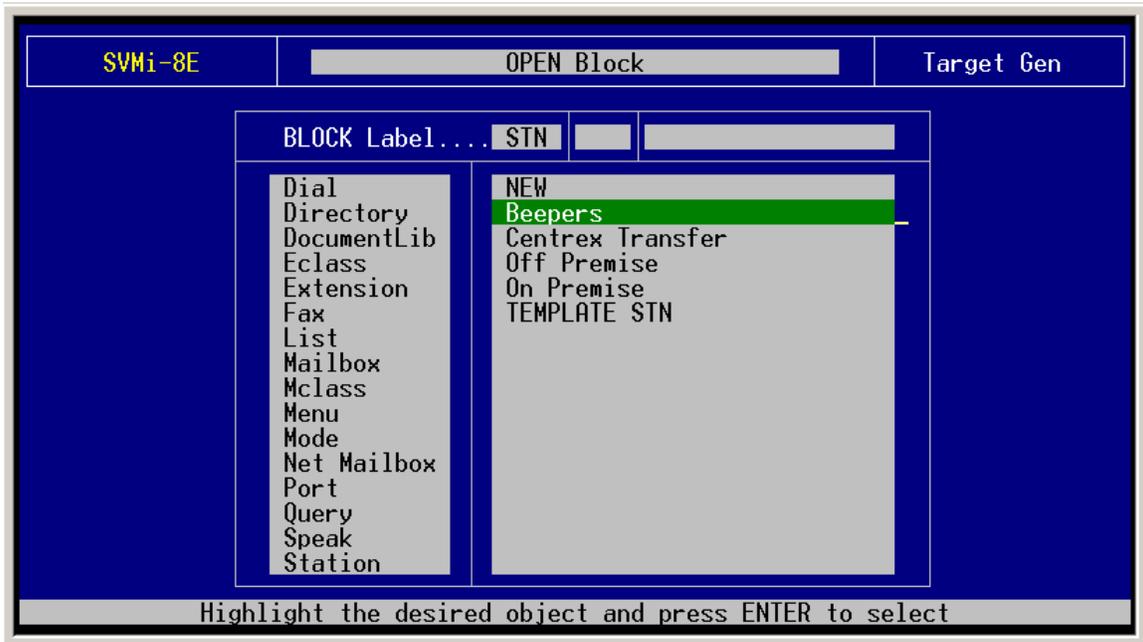

12. Make sure that there is a **9**, in the **Prefix** field so that a trunk can be accessed for the pager notification.

13. The **Suffix** field may be edited to accommodate pagers that do not work with the default values (default values work with most pagers).



14. Press **Ctrl+E** to save the programming and exit the screen.

This concludes all necessary programming required to set up this feature.

If you have any questions about this or any other SVMi Application please contact Samsung Technical Support by phone at 1-800-737-7008 or by email at: BCS.Support@Samsung.com